


BHG-WM WATTMETER


Specifications:

AC Voltmeter:	0 - 200 V Rms
AC Ammeter:	0 - 100 A Rms
Power Factor:	0.50 - 1.00
Max Wattage:	15,000 Watts
Frequency range:	15 - 100 Hz
Display:	1.3" OLED Monochrome
Connectors:	3.81 mm Plug connectors
Case material:	PETG Plastic
Dimensions:	Height: 1.1" - Width: 2.65" - Depth: 1.57"



Wiring diagram:

- + Battery Positive
- Battery Ground
- R - Remote (Head Unit)
- V - Connect to Car Amplifier speaker output + & -
- C - Connect to the Current Transformer that goes around the positive or negative speaker wire.

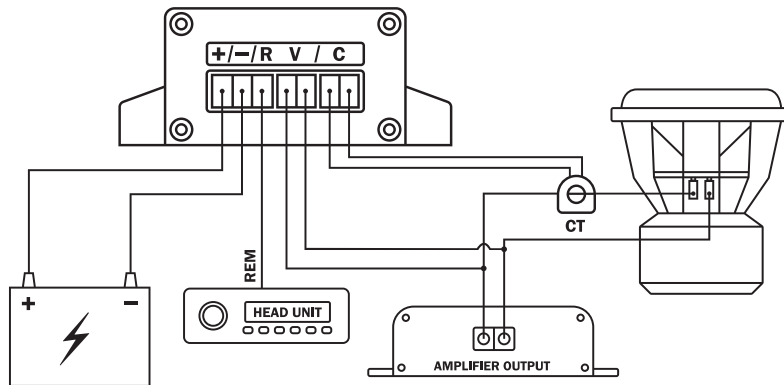

Functions:

Pressing the button allows you to change between various display modes, each showcasing different information:

- Wattage
- Impedance
- Power factor
- AC Voltage
- AC Amperage

PEAK MODE - Holding the button for an extended duration activates PEAK MODE, displaying the peak of each value. To deactivate, hold the button again.

Display modes:

